

DECO Touch

5.00 / 0.7mm

HABITAT - CLIC+

Plank Size


1220 x 229 x 6,5mm

1220 x 180 x 6,5mm

Carton

8 Planks (2,23m²)

10 Planks (2,20m²)



HIGH TRAFIC AREA - 6.5mm



COLORS

FOR ALL THE COLORS
PLEASE CONTACT US



SP0813



SP1404



SP0896



SP1405



SP0897



SP1427



SP0914



SP1432



SP1403




SP1452

HABITAT-CLIC+ Technical Sheet

CLASSIFICATION	STANDARDS	RESULTS
Type	EN ISO 10382	Rigid Flooring
Classification	EN ISO 10382	Commercial 33
TECHNICAL PERFORMANCES	STANDARDS	RESULTS
Thickness of Core	EN ISO 10382	6mm
Thickness of Wear Layer	EN ISO 24340	0.7mm
Total Thickness	EN ISO 24346	7mm
Underlayment		1MM IXPE
Surface Treatment		Matt Coating Texture
Beveled Edges		Micro Bevel
Dimensional stability	EN ISO 23999	Ç0,05%
Curling resultant to heat	EN ISO 23999	≤0.5mm/m
Peeling resistance	EN 438-2	≥ 0.8 N/mm ²
Locking strength	EN ISO 24343	≥ 100N/30mm
Reaction to fire	EN ISO 13301-1	Bfl-s1
Residual indentation	EN ISO 24343-1	Ç0.10mm
Abrasion resistance	EN 13329	12000 AC5 CLASS33
Scratch resistance	EN 660-2	≥ 4 N
Impact resustance	EN 660-2	≥ 5 J
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 / EN 423 DIN 31130	No damage R10
Slip resistance	EN 14411	Classe CoF dry ≥ 0.50, wet ≥ 0.40.
Thermal resistance	EN ISO 10436	≈ 0.06 m ² ·K/W
Light fastness	ISO 105-B02	≥ 3
Chemical resistance	EN ISO 26987	No damage
Electrostatic properties	EN 1813	10 [^] 6 Ω - 10 [^] 9 Ω
Impact sound reduction	ISO 140-8	ΔLW ≥ 19-23dB

■ Structure of SPC

DECO TOUCH

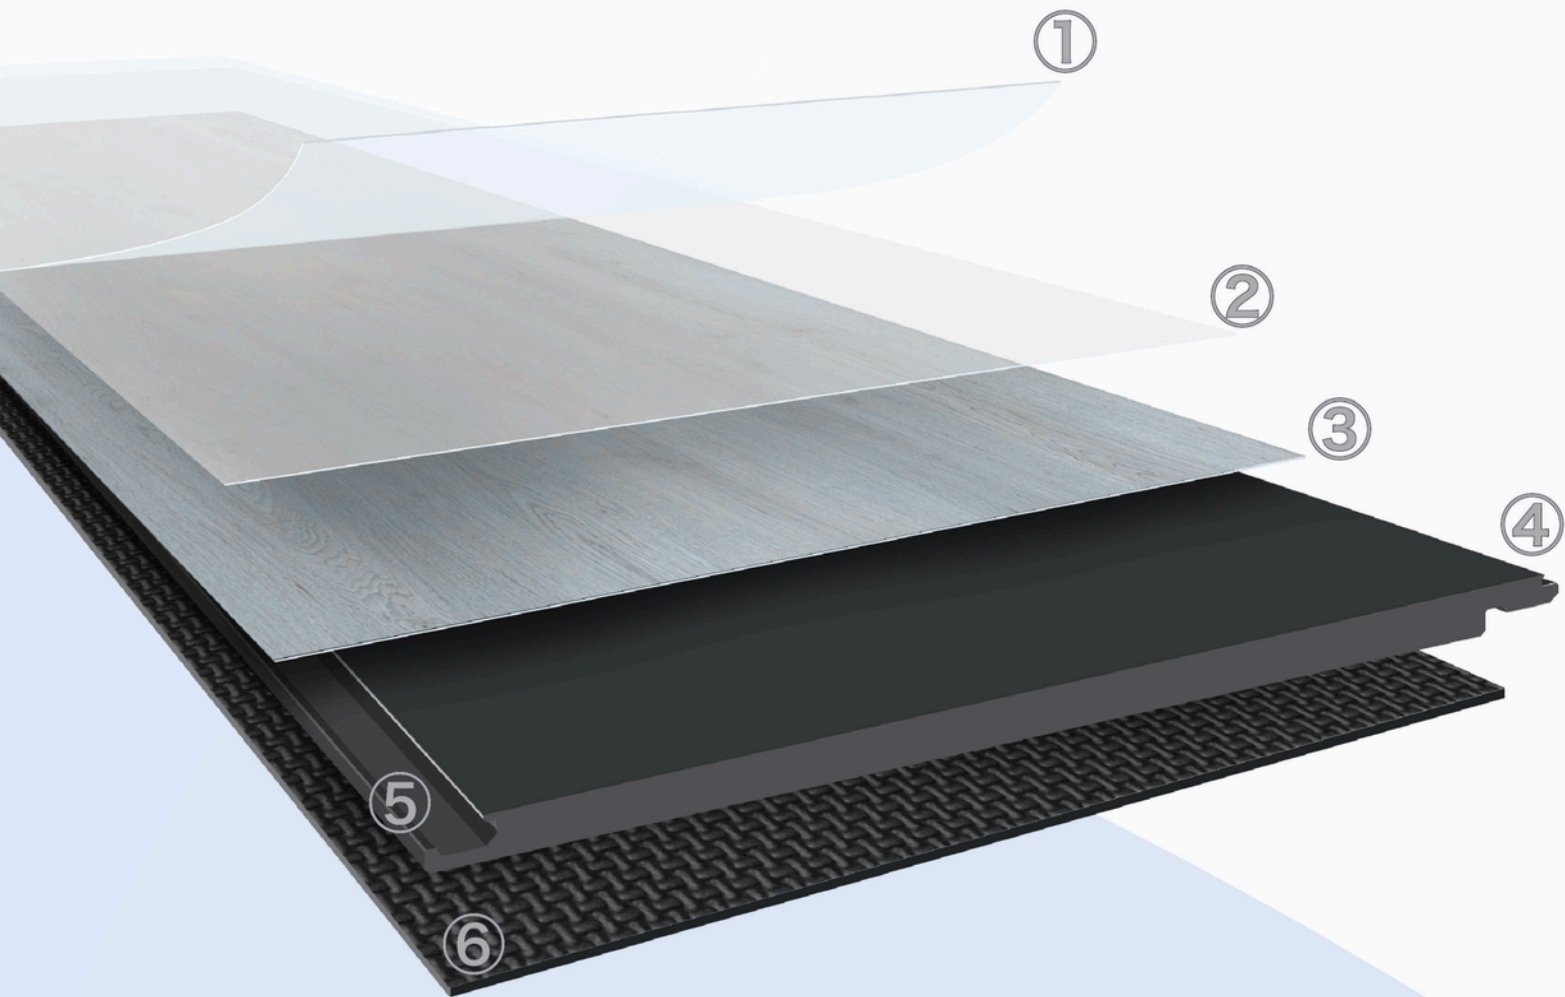

① Advanced UV coating:

The coating layer is the topmost layer of SPC flooring, provide good anit-scratches and anti-stains performance.

② Wear Layer:

The wear layer is responsible for protecting the underlying layers from wear & tear.

③ Decorative Layer:

It's printed with high-resolution images to mimic the look and texture of real flooring materials.

④ SPC Core:

The core layer is composed of natural limestone powder and pvc, that's resistant to indentation and deformation.

⑤ Click System:

We insist to use the most popular click system on SPC flooring, provide a easy and fast installation experience.

⑥ IXPE Underlay:

The IXPE underlay is placed beneath the SPC flooring to provide additional cushioning and sound absorption.

SIZE / DIMENSION	THICKNESS	QUANTITY			
		CARTON	PALLET	CONTAINER (TC 20'GP)	WEIGHT
1220 x 229mm	6.5mm 5/0.5+1.5mm	8pcs/ carton 2.23sqm/ carton 24.8kg/ carton	54 cartons/ pallet	20 pallets/2413sqm/20gp	27 tons
1220 x 180mm		10pcs/ carton 2.20sqm/ carton 24.5kg/ carton	54 cartons/ pallet	20 pallets/2371sqm/20gp	27 tons