

DECO Touch

6.00 / 0.7mm

HABITAT - CLIC+

Plank Size


1220 x 229 x 7,0mm

1220 x 180 x 7,0mm

Carton

6 Planks (1,68m²)

8 Planks (1,76m²)



HIGH RESISTANCE - 7mm



HIGH TRAFIC AREA



COLORS

FOR ALL THE COLORS
PLEASE CONTACT US



SP0813



SP1404



SP0896



SP1405



SP0897



SP1427



SP0914



SP1432



SP1403



SP1452

HABITAT-CLIC+


Technical Sheet

DECO TOUCH

CLASSIFICATION	NORMES	RÉSULTAT
Type	EN ISO 10382	Rigid Flooring
Classification	EN ISO 10382	Commercial 33
CHARACTÉRISTIQUES TECHNIQUES	NORMES	RÉSULTAT
Épaisseur de l'âme	EN ISO 10382	6mm
Épaisseur de la couche d'usure	EN ISO 24340	0.7mm
Épaisseur totale	EN ISO 24346	7mm
Sous-couche		1MM IXPE
Traitement de surface		Matt Coating Texture
Bords chanfreinés		Micro Bevel
Stabilité dimensionnelle	EN ISO 23999	Ç0,05%
Déformation due à la chaleur	EN ISO 23999	≤0.5mm/m
Résistance au pelage	EN 438-2	≥ 0.8 N/mm ²
Résistance du système de verrouillage	EN ISO 24343	≥ 100N/30mm
Réaction au feu	EN ISO 13301-1	Bfl-s1
Indentation résiduelle	EN ISO 24343-1	Ç0.10mm
Résistance à l'abrasion	EN 13329	12000 AC5 CLASS33
Résistance aux rayures	EN 660-2	≥ 4 N
Résistance aux chocs	EN 660-2	≥ 5 J
Résistance aux pieds de meubles	EN 424	No damage
Résistance aux chaises à roulettes	ISO 4918 / EN 423 DIN 31130	No damage R10
Résistance au glissement	EN 14411	Classe CoF dry ≥ 0.50, wet ≥ 0.40.
Résistance thermique	EN ISO 10436	≈ 0.06 m ² ·K/W
Solidité à la lumière	ISO 105-B02	≥ 3
Résistance aux produits chimiques	EN ISO 26987	No damage
Propriétés électrostatiques	EN 1813	10 ⁶ Ω - 10 ⁹ Ω
Réduction des bruits d'impact	ISO 140-8	ΔLW ≥ 19-23dB

■ Structure of SPC

DECO TOUCH

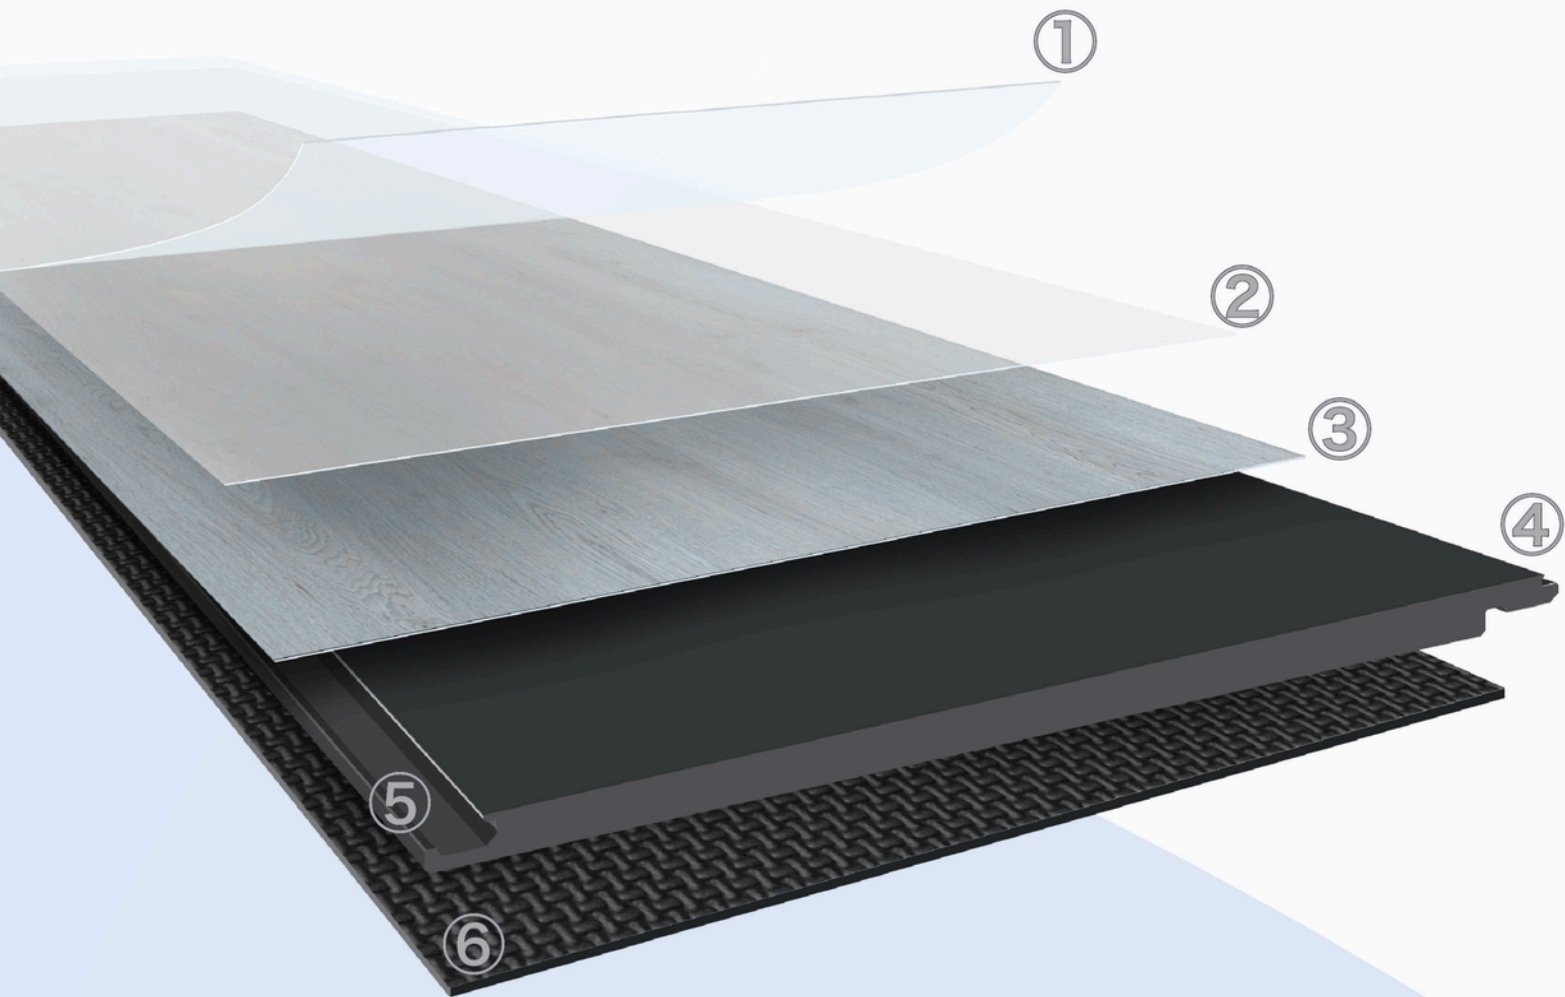

① **Advanced UV coating:**

The coating layer is the topmost layer of SPC flooring, provide good anit-scratches and anti-stains performance.

② **Wear Layer:**

The wear layer is responsible for protecting the underlying layers from wear & tear.

③ **Decorative Layer:**

It's printed with high-resolution images to mimic the look and texture of real flooring materials.

④ **SPC Core:**

The core layer is composed of natural limestone powder and pvc, that's resistant to indentation and deformation.

⑤ **Click System:**

We insist to use the most popular click system on SPC flooring, provide a easy and fast installation experience.

⑥ **IXPE Underlay:**

The IXPE underlay is placed beneath the SPC flooring to provide additional cushioning and sound absorption.

SIZE / DIMENSION	THICKNESS	QUANTITY			
		CARTON	PALLET	CONTAINER (TC 20'GP)	WEIGHT
1220 x 229mm	7mm 6/0.7+1mm	6pcs/ carton 1.68sqm/ carton 22.4kg/ carton	60 cartons/ pallet	20 pallets/ 2011sqm/ 20gp	27tons
1220 x 180mm		8pcs/ carton 1.76sqm/ carton 23.4kg/ carton	58 cartons/ pallet	20 pallets/ 2037sqm/ 20gp	27tons

